(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



THE DIA BRICHERY BURNE COLOR DUE IN AN HOURS LIBERT COME FROM THE BURNE FOR LIBERT FOR THE FOREIGN FOR THE FOR

(43) International Publication Date 18 September 2003 (18.09.2003)

PCT

(10) International Publication Number WO 03/076198 A1

- (51) International Patent Classification7: B41J 3/36, 3/28. G06K 11/08, 11/18
- PCT/SE03/00391 (21) International Application Number:
- (22) International Filing Date: 10 March 2003 (10.03.2003)
- (25) Filing Language:

English

(26) Publication Language:

English

- (30) Priority Data: 0200709-4
- 11 March 2002 (11.03 2002)
- (71) Applicant (for all designated States except US): PRINT DREAMS EUROPE AB [SE/SE]. Norgegatan 1, S.164 32 Kişta (SE).

- (74) Agents: ZACCO SWEDEN AB ci al., P.O. Box 23101, Sveavägen 170, S-104 35 Stockholm (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ. DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH. GM, HR, HU, ID. IL, IN. IS, IP. KE, KG, KP, KR, KZ, LC, LK, LR, I.S, LT, LU. LV, MA. MD, MG, MK, MN. MW. MX. MZ, NI, NO. NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, H, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, B), CF, CG, Cl. CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventor; and


(75) Inventor/Applicant tfor US only): WALLING, Alex, M. [SE/SE], Lindevagen 128, S-120 48 Enskede Gård (SE).

Published:

with international search report

[Continued on next page]

(54) Title: HAND HELD PRINTING OF TEXT AND IMAGES FOR PREVENTING SCIEW AND CUITING OF PRINTED IMAGES

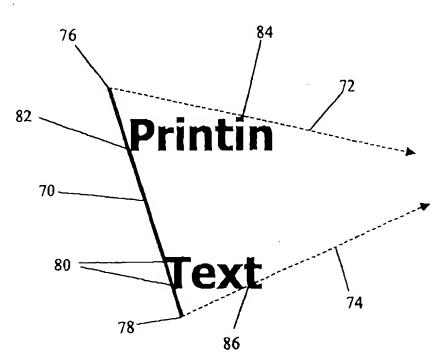

(57) Abstract: The invention relates to a sensor and (2) assembly comprised in a housing (1) for a hand-held and hand-operated printing device controlled by a processor (4), and a method therefore. It provides that the assembly comprises an attangement and a method for preventing skew and cutting of printed images.